



## **LEAD**

## 91503 Lightweight metal-free insulated safety shoes
























Upper: suede and breathable mesh fabric stitched upper, comfortable and breathable

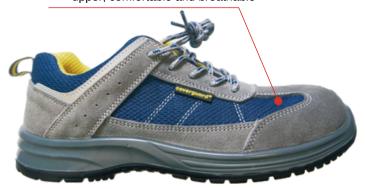

Toe: Non-metallic anti-smash toe, can withstand 200J impact force and 15KN pressure protection.



Sole: Dual-density polyurethane PU sole, oil and dirt resistant, non-slip SRC grade



## **FEATURES**

- 100% Metal free, light and flexible, in line with the new national standard GB 21148-2020
- Breathable 3D mesh lining and side fly fabric streamline design
- The overall weight is about 1000g per pair (91503 42 yards)
- Grey suede leather with good dirt resistance
- V- shaped reflective strips on both sides of the shoe mouth for safety
- Heel reinforcement, better stability, coupled with heel pull loop design, it is more convenient to wear
- Anatomical EVA insole with anti slip and sole cushioning function

## **APPLICATIONS**

 Automobile industry, machinery manufacturing, electronic equipment, construction engineering, metal processing, hardware assembly

	35	36	37	38	39	40	41	42	43	44	45	46	47	48
Shoe lining length	231.31	237.98	244.65	251.32	257.99	264.66	271.33	278	284.67	291.34	298.01	304.68	311.35	318.02
Length of the sole	252.31	258.98	265.65	272.32	278.99	285.66	292.33	299	305.67	312.34	319.01	325.68	332.35	339.02

